

Milliken™

**LOCAL MEASURE**  
WILDERNESS






# LOCAL MEASURE WILDERNESS

Homegrown, home sourced and homemade. Local Measure Wilderness celebrates the beauty found in the simple things that sustain us; the elements rooted in our Earth that nourish and provide.

Proudly produced in the USA, Local Measure offers individually made-to-order styles featuring the best of product performance fused with desired aesthetic. Designing with Local Measure is easy — simply select a color and a platform that meets your needs. The result is a durable, solution-based LVT option that is budget-friendly and designer approved.

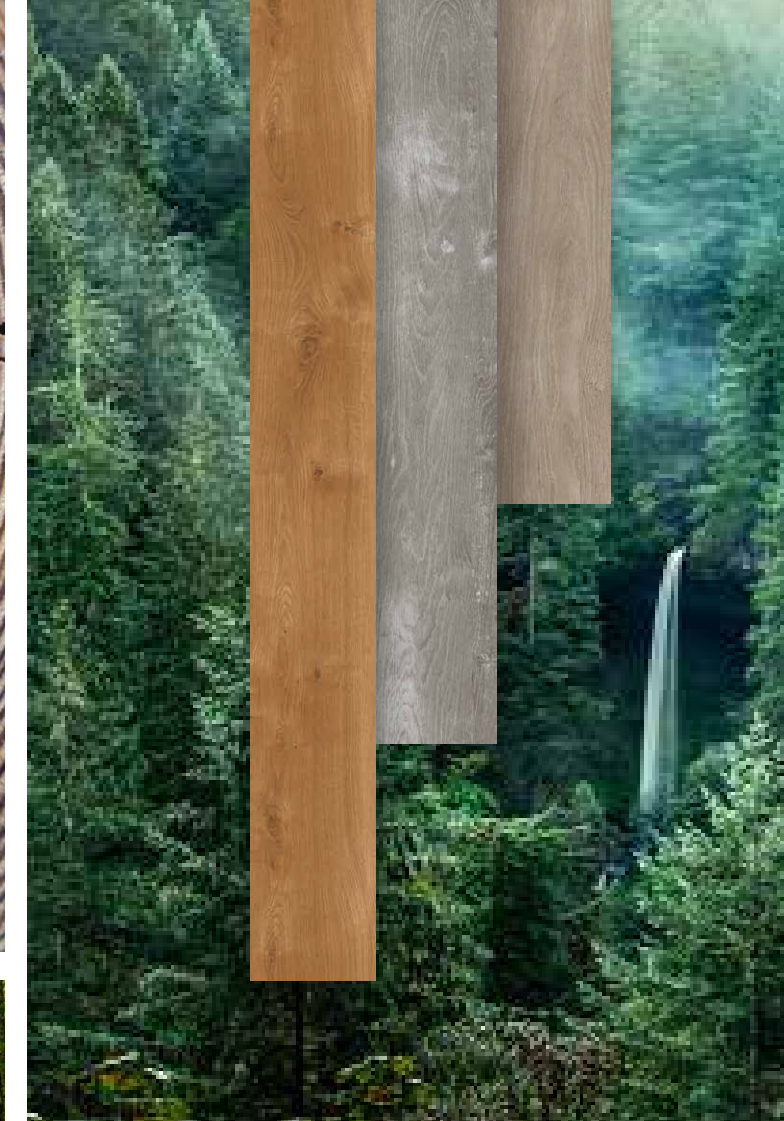

## MADE IN AMERICA

As a domestically-made product, Local Measure promises you peace-of-mind with increased reliability and shipment speeds.



## MOISTURE MANAGEMENT

Don't let moisture get in the way of a perfect install. Milliken offers cost effective fully warranted solutions that do NOT require moisture testing.



## ACOUSTICS

Milliken acoustic underlayment is the perfect solution for flooring professionals seeking a quiet and comfortable floor.



## COMMERCIAL WARRANTY OPTIONS


ProGuard™ coatings are backed by 10 or 15 Year Warranties. ProGuard Max™ is backed by a 22 Year Warranty.



## PROGUARD™ & PROGUARD MAX™

Select between our polyurethane coatings for best in class scratch and stain resistance.



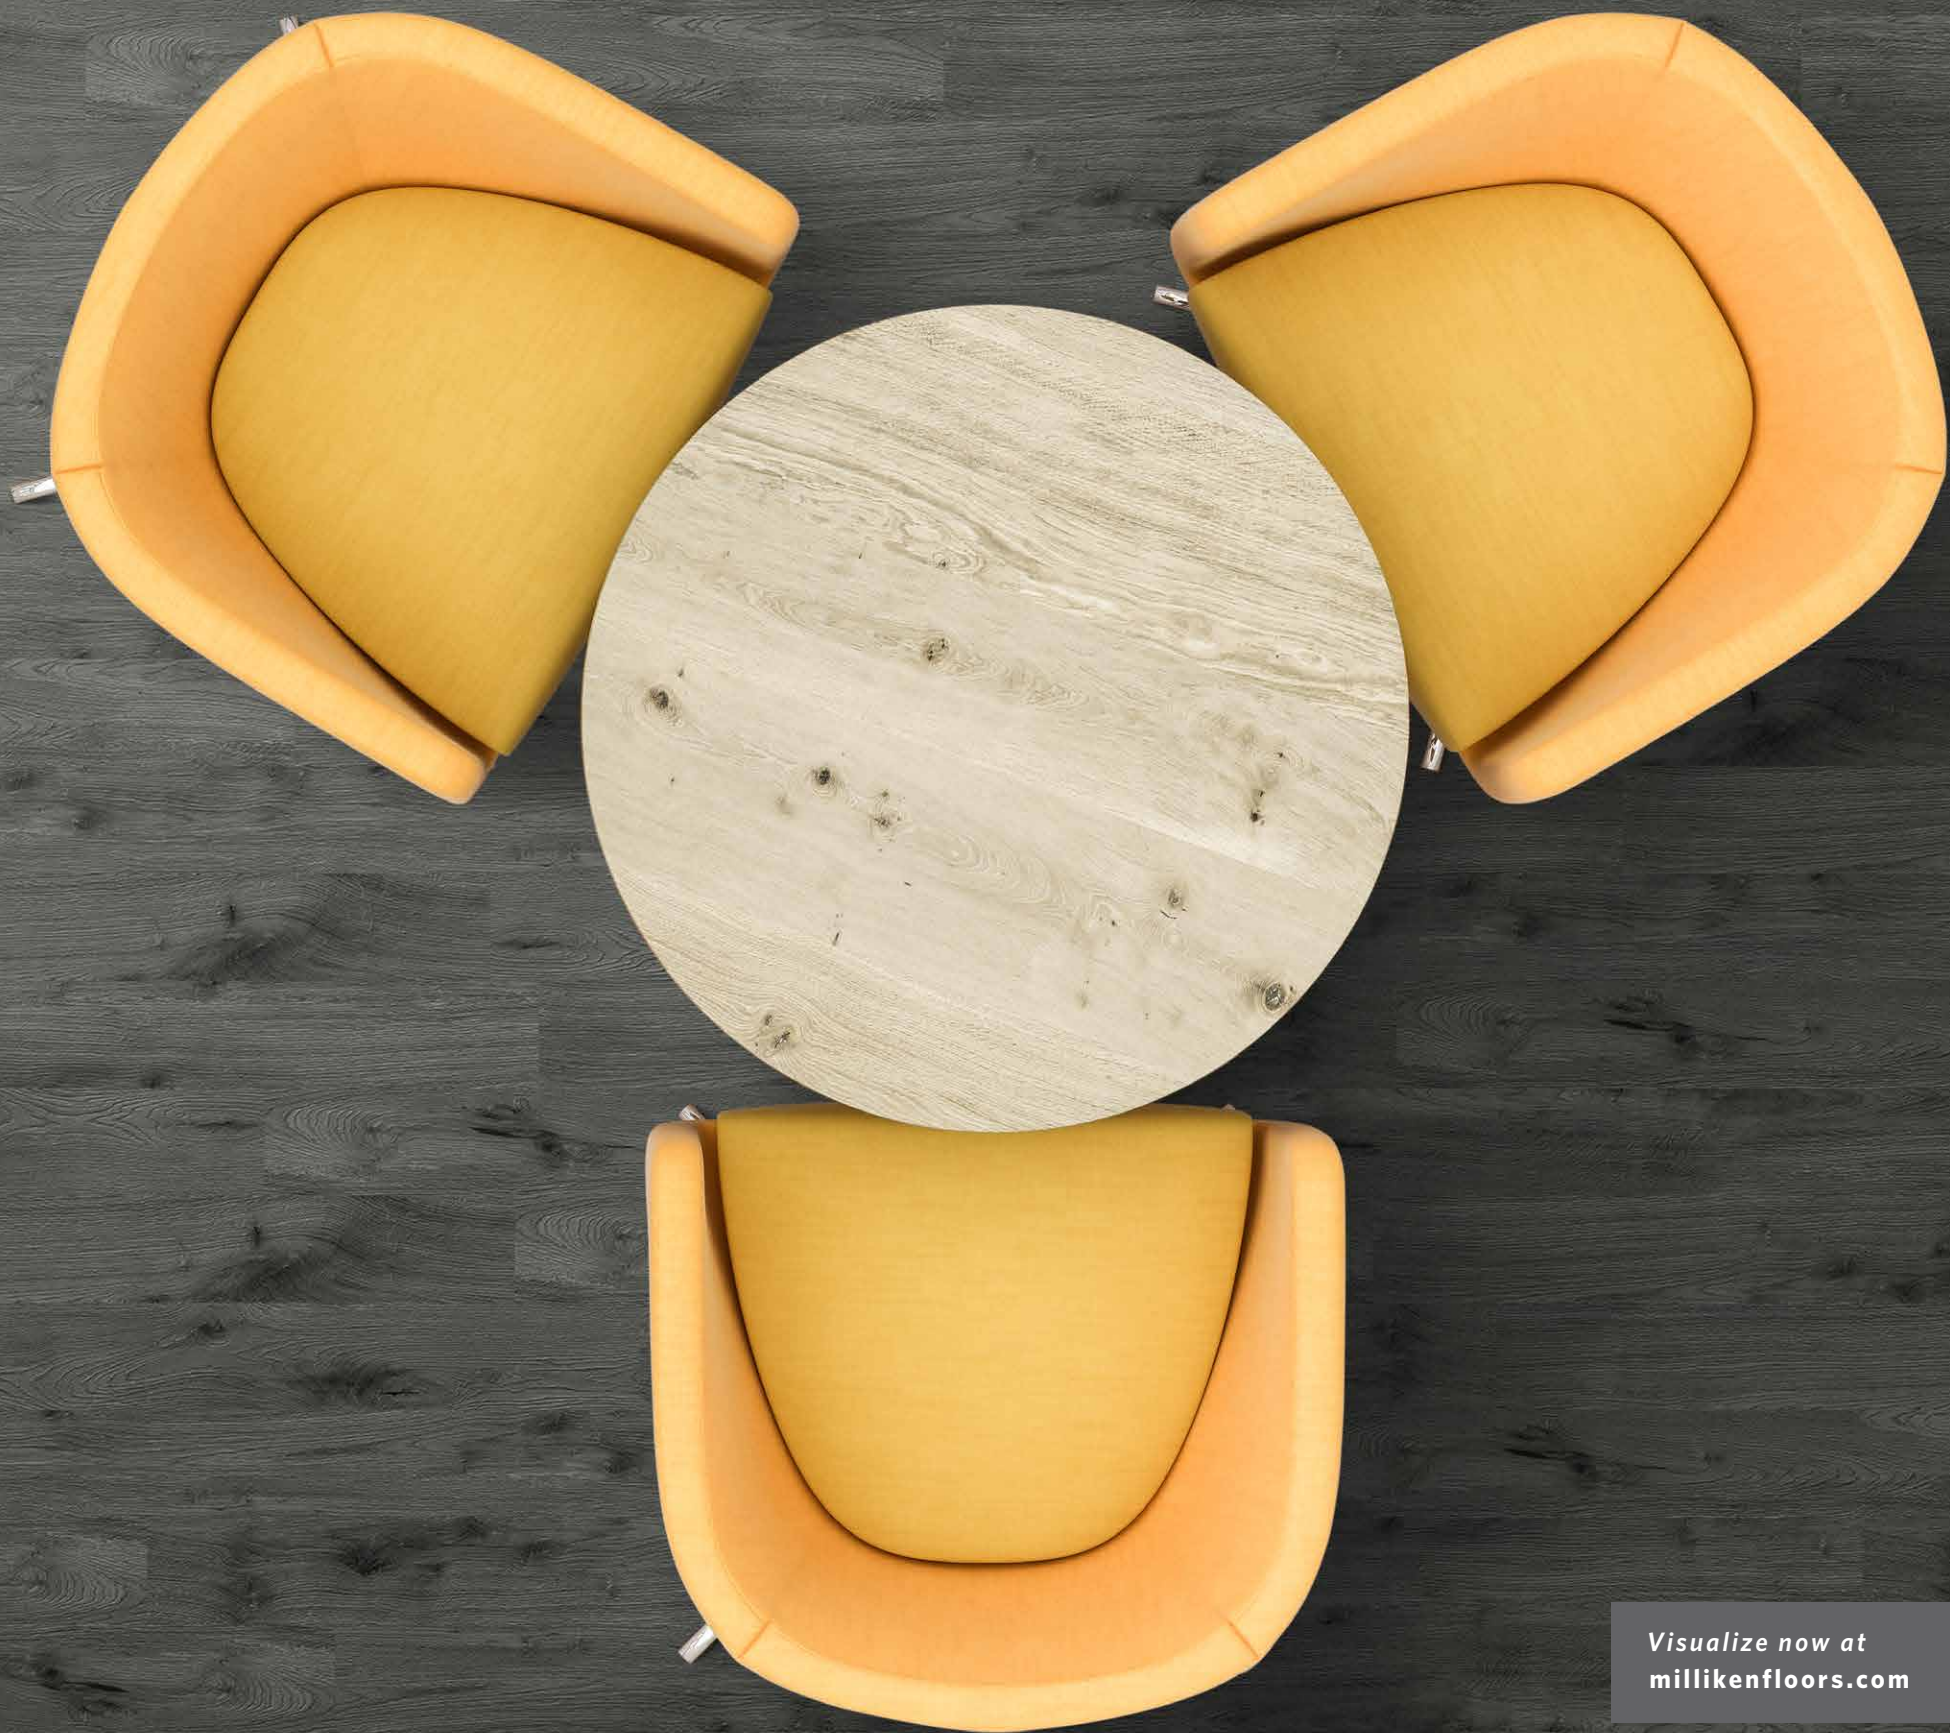

Visualize now at  
[millikenfloors.com](https://millikenfloors.com)

# TIMELY DELIVERIES, LOCALLY SOURCED

Visualize now at  
[millikenfloors.com](https://millikenfloors.com)



Visualize now at  
[millikenfloors.com](http://millikenfloors.com)



**LOCAL MEASURE WILDERNESS IN YEW**

SWD236. 6" x 48" planks. Random.



Visualize now at  
[millikenfloors.com](http://millikenfloors.com)



COLORS, BOLD AND  
SUBTLE, SUITABLE FOR  
ANY PROJECT SPACE

**LOCAL MEASURE WILDERNESS IN FOXTAIL**  
SWD204. 6" x 48" planks. Random.



Visualize now at  
[millikenfloors.com](http://millikenfloors.com)



Visualize now at  
[millikenfloors.com](http://millikenfloors.com)





NATURALLY  
INSPIRED STYLES



**LOCAL MEASURE WILDERNESS IN CORIANDER**  
SWD235. 6" x 48" planks. Herringbone.



**LOCAL MEASURE WILDERNESS IN PEPPERCORN**  
SWD67. 6" x 48" planks. Half Drop.



Visualize now at  
[millikenfloors.com](https://millikenfloors.com)

# LOCAL MEASURE WILDERNESS

SELECT YOUR COLOR, SELECT YOUR  
PLATFORM, CONTACT YOUR REP

WARM COLOR LINE

CONTACT YOUR REP




**FOXTAIL** SWD204



**CASIA** SWD206



**YEW** SWD216



**ALLSPICE** SWD121



**TURMERIC** SWD136



**BUCKEYE** SWD222



**GINGER** SWD214



**NUTMEG** SWD224

ORDER REFERENCE GUIDE				
COLOR:	PLATFORM		WEAR WARRANTY:	FINISH:
	THICKNESS	WEAR LAYER		
SWD(Color)	2.0mm	12 mil	10 Year	ProGuard
MWD(Color)	2.5mm	22 mil	15 Year	ProGuard
LWD(Color)	5.0mm	22 mil	22 Year	ProGuard Max

# LOCAL MEASURE WILDERNESS

SELECT YOUR COLOR, SELECT YOUR  
PLATFORM, CONTACT YOUR REP

COOL COLOR LINE

CONTACT YOUR REP



**BALM** SWD219



**CORIANDER** SWD235




**BASIL** SWD145



**CHERVIL** SWD218



**JUNIPER** SWD210



**CLOVE** SWD165



**ROSEMARY** SWD124



**PEPPERCORN** SWD67




**SESAME** SWD79

ORDER REFERENCE GUIDE				
COLOR:	PLATFORM		WEAR WARRANTY:	FINISH:
	THICKNESS	WEAR LAYER		
SWD(Color)	2.0mm	12 mil	10 Year	ProGuard
MWD(Color)	2.5mm	22 mil	15 Year	ProGuard
LWD(Color)	5.0mm	22 mil	22 Year	ProGuard Max

# LOCAL MEASURE WILDERNESS


## FLEXFORM™ LVT CONSTRUCTION

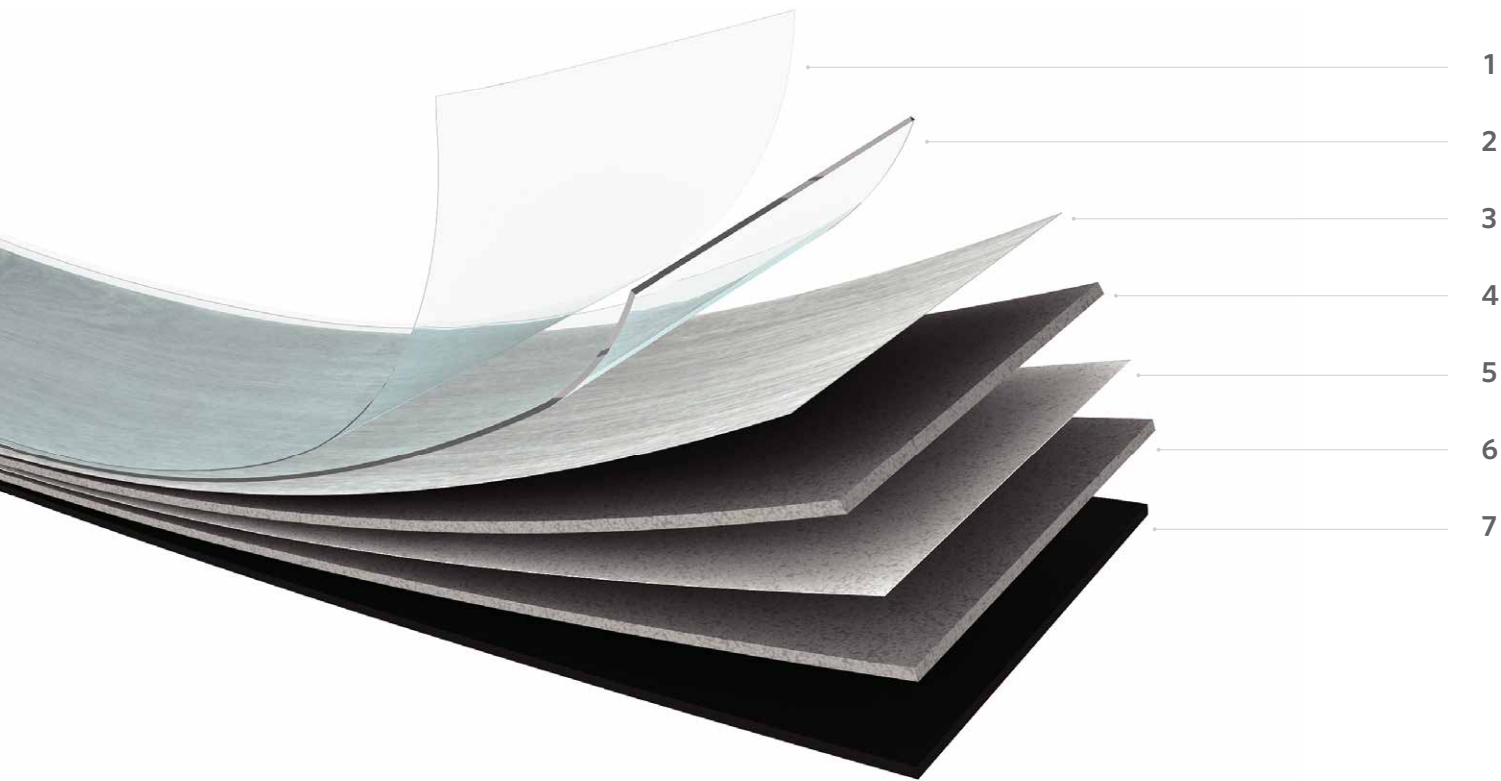

OVERALL  
THICKNESS  
5mm (.197")

WEAR LAYER  
THICKNESS  
22 mil (0.55 mm)

1. **PROGUARD MAX™ REINFORCED POLYURETHANE COATING**  
Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
2. **WEAR LAYER**  
Heavy commercial grade 22 mil transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.
3. **PRINTED LAYER**  
State of the art printing technology providing authentic visuals and designs.
4. **INTEGRAL SOUND ABSORPTION LAYER**  
Provides improved acoustical performance and supports comfort underfoot.
5. **GLASS FIBER LAYER**  
Supports dimensional stability.
6. **HIGH PERFORMANCE CORE LAYER**  
Ensures excellent durability, stability and long term performance.
7. **BACKING LAYER**  
Engineered balance layer provides stability and durability of the product.

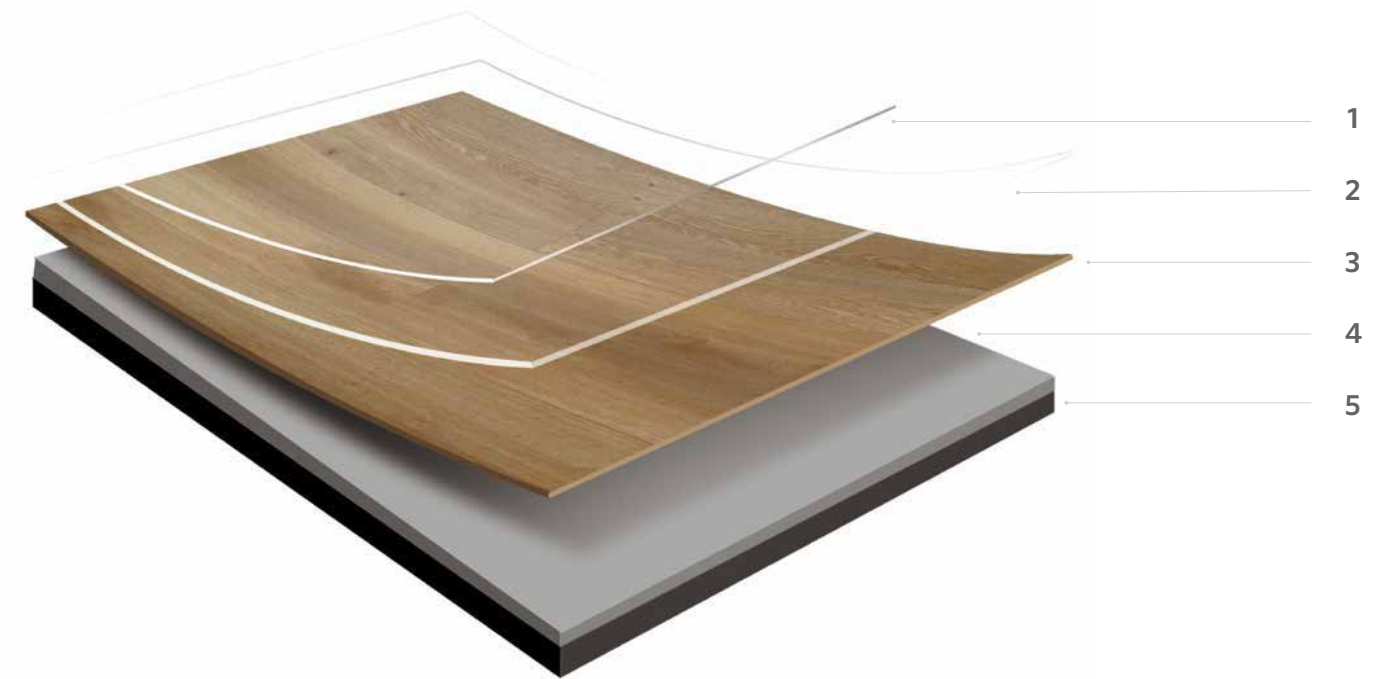

OVERALL  
THICKNESS  
2.0mm (.079")

WEAR LAYER  
THICKNESS  
12 mil (0.3 mm)

1. **PROGUARD™ REINFORCED POLYURETHANE COATING**  
Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
2. **WEAR LAYER**  
Light commercial grade 12 mil transparent wear layer protects the print visuals and ensures product performs in light foot traffic.
3. **PRINTED LAYER**  
State of the art printing technology providing authentic visuals and designs.
4. **HIGH PERFORMANCE CORE LAYER**  
Ensures excellent durability, stability and long term performance.
5. **BACKING LAYER**  
Engineered balance layer provides stability and durability of the product.

OVERALL  
THICKNESS  
2.5mm (.098")

WEAR LAYER  
THICKNESS  
22 mil (0.55 mm)

1. **PROGUARD™ REINFORCED POLYURETHANE COATING**  
Integrated surface technology provides best in class scratch & stain resistance, eliminates the need for additional finishes or harsh chemical treatments.
2. **WEAR LAYER**  
Heavy commercial grade 22 mil transparent wear layer protects the print visuals and ensures product performs in heavy foot traffic.
3. **PRINTED LAYER**  
State of the art printing technology providing authentic visuals and designs.
4. **HIGH PERFORMANCE CORE LAYER**  
Ensures excellent durability, stability and long term performance.
5. **BACKING LAYER**  
Engineered balance layer provides stability and durability of the product.

	2.0mm (12 mil)	2.5mm (22 mil)	5.0mm (22 mil)
<b>CONSTRUCTION</b>			
<b>Coating</b>	ProGuard™	ProGuard™	ProGuard Max™
<b>Wear Layer</b>	12mil (0.3mm)	22mil (0.55mm)	22mil (0.55mm)

<b>SHIPPING INFORMATION</b>			
<b>Size</b>	6" W x 48" L	6" W x 48" L	6" W x 48" L
<b>Pieces/Box</b>	27 Pieces	18 Pieces	10 Pieces
<b>SF/Box</b>	54 SF	36 SF	20 SF
<b>Boxes/Pallet</b>	48 Boxes (2,592 SF)	48 Boxes (1,728 SF)	54 Boxes (1,080 SF)

<b>ADDITIONAL INFORMATION</b>			
<b>Warranty</b>	10 Year Limited Light Commercial	15 Year Limited Commercial	22 Year Limited Commercial
<b>Recommended Use</b>	Multi-Family, Dorm Rooms, Military Housing, Senior Living, Residential and Light Traffic Commercial	Healthcare, Assisted Living, Hospitals, Corporate, Education and Retail for High Traffic Commercial	Healthcare, Assisted Living, Hospitals, Corporate, Education, Retail and Hospitality for High Traffic Commercial
<b>Attributes</b>	Low-cost value for light traffic commercial or residential sensitive budgets (\$)	Mid-cost for high traffic sensitive budgets (\$\$)	Higher-cost for high traffic and modular with carpet tile height - transitionless (\$\$\$)
<b>Installation</b>	Glue Down	Glue Down	Glue Down or Loose Lay
<b>Acoustics</b>	Underlayment needed for increased acoustic performance for multi-family buildings	Underlayment needed for increased acoustic performance for multi-family buildings	Integral Sound Absorption Layer

### SHADE VARIATION GUIDE



Just as texture and physical appearance will vary in samples of wood, beautiful variations of shade are found in this unique LVT product. The shade variation guide reflects our LVT styles ranging from low, to moderate, to high. Low shade variation features soft and subtle gradations. Moderate shade variation contains a more distinguishable variety of hue. And high shade variation models the highest level of contrast. **LOCAL MEASURE WILDERNESS** has **LOW** shade variation.

## LOCAL MEASURE Product Specs

The information shown here is only a partial listing of the full product information. Visit our website for the complete and most up-to-date specifications of each product.

### FLEXFORM // Wood

#### Tile/Plank Sizes

6" x 48"

#### Overall / Wear Layer Thickness

2.0mm (12 mil)  
2.5mm (22 mil)  
5.0mm (22 mil)

#### Construction

Luxury Vinyl Tile

#### Edge Profile

Square

#### Plasticizer

100% Phthalate-free

#### Critical Radiant Flux

Pass - Class I

#### Smoke Density (ASTM E662)

Pass - ≤ 450

#### Short-Term/Residual Indentation (ASTM F1914-07)

Pass

#### Flexibility (ASTM F137)

Pass

#### Heat Stability by Color Change (ASTM F1514)

Pass

#### Light Stability (ASTM F1515)

Pass

#### Static Coefficient of Friction (ASTM D2047)

Pass

#### Dimensional Stability (ASTM F2199)

Pass

#### Resistance to Chemicals (ASTM F925)


Pass

#### Static Load Limit (ASTM F970)


Pass

Overall Thickness	Wear Layer	Finish	Installation Type	Wear Warranty
2.0mm	12 mil	ProGuard™	Glue Down	10 Year Limited Light Commercial
2.5mm	22 mil	ProGuard™	Glue Down	15 Year Limited Commercial
5.0mm	22 mil	ProGuard Max™	Glue Down or Loose Lay	22 Year Limited Commercial


### Recommended Installation Methods




Herringbone



Ashlar



Vertical Ashlar



Random



# LOCAL MEASURE WILDERNESS

FLEXFORM™ LVT

## SUSTAINABLE FEATURES

Milliken LVT is durable resilient flooring engineered with the highest quality raw materials to provide unsurpassed performance and enduring aesthetics. Milliken LVT is 100% phthalate free. All production waste is granulated and recycled into backing production to create an internal closed loop recycling process. Milliken LVT is manufactured at facilities that are ISO 9001 compliant.

Milliken LVT meets many environmental standards, including FloorScore® certified, Prop 65 Free and Phthalate Free, Certified EPD, and Declare.



**Declare.**

Images in this brochure are approximate for color and pattern scale. Please use actual samples to make your final selections.

Cover and Back Cover: Local Measure in Casia and Chervil.

Milliken™

Customer Concierge 800.824.2246 | millikenfloors.com  
© 2020 Milliken & Company | Design © Milliken & Company | Made in the USA